
WHAT IS THE **TRUE COST** OF YOUR AIR DRYING SYSTEM?

Manual change desiccant systems require you to perform maintenance by monitoring a moisture indicator. Unfortunately, when the indicator starts to change color, your air has already exceeded the recommended humidity threshold by 100 percent; this results in poorly performing air systems.

Tsunami systems are self-regenerating to assure ultra clean, dry air. Approximately every two minutes, a controlled signal forces an internal piston to shift. The shift in the piston redirects airflow through the opposite canister(s) while simultaneously back-flowing a small amount of dry air through the previously utilized tower; it's like changing your desiccant every two minutes!

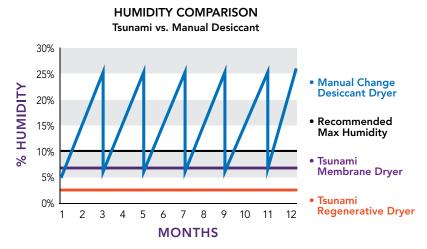

| TYPICAL COST OF MANUAL CHANGE DESICCANT SYSTEMS | |
|--|-------|
| Upfront purchase cost of manual desiccant dryer system | \$500 |
| 1 st stage coalescence element (\$25 each, change 4 times per year) | \$100 |
| 2 nd stage coalescence element (\$100 each, change once per year) | \$100 |
| Desiccant (\$90, change minimum 6 times per year on average) | \$540 |
| Total annual cost of manual change desiccant system | \$740 |

| HIDDEN COSTS | |
|---|--------|
| Bad paint job as a result of humid air (exceeding 10%) | ??? |
| Downtime performing required maintenance | ??? |
| Lost labor diagnosing air problems | ??? |
| Labor costs incurred changing desiccant 6+ times per year | ??? |
| Total annual cost of manual change desiccant system | \$???? |

| ANNUAL MAINTENANCE COST | 1 ^{s⊤} STAGE ANNUAL COST | 2 ND STAGE ANNUAL COST | ANNUAL MEDIA COSTS | YEAR 1 | YEAR 2 | YEAR 3 | TOTAL OVER 3 YEARS |
|------------------------------------|--------------------------------------|--------------------------------------|-----------------------|--------|--------|--------|-----------------------|
| Manual Change Desiccant Dryer | \$100 | \$100 | \$540 | \$740 | \$740 | \$740 | \$2,200 |
| Tsunami Membrane Dryer | \$0 | \$120 | \$0 | \$120 | \$120 | \$120 | \$360 |
| Tsunami Pure-10 Regenerative Dryer | \$0 | \$120 | \$0 | \$120 | \$120 | \$120 | \$360 |
| Tsunami Ultra Regenerative Dryer | \$0 | \$140 | \$0 | \$140 | \$140 | \$140 | \$420 |



FOR MORE INFORMATION ON TSUNAMI

Contact a Tsunami distributor or call 1.800.782.5752 10531 Dalton Ave. NE | Monticello, MN 55362 | TSUNAMI.US.COM

TSUNAMI COMPRESSED AIR SOLUTIONS





PURE 10 REGENERATIVE DRYERS

Annual maintenance cost \$120 (2nd stage element) after 3+ years at \$220 / per desiccant canister

The newest line to Tsunami Compressed Air Solutions[™], Pure-10 Regenerative Dryers provide similar benefits to the Ultra Dryers at a reduced cost. Pure-10 systems incorporate a simple control system and Tsunami pre-filtration to eject water and oil before entering the dryer where humidity is removed.

- Low relative humidity down to .01% RH
- Dew points down to -80°F
- Easy, low-cost maintenance under \$125/year average
- One year warranty (1010-MM, 0955)

Pure-10 model dryers are available with either float or Moisture Minder® pneumatic drains.

| PART NUMBER | SIZE | MAX FLOW | DRAIN | PORT SIZE | WEIGHT | DIMENSIONS (HWD) |
|---------------|-------|----------|-----------|-----------------------|---------|------------------|
| 21999-1010 | 10 hp | 40 CFM | Float | 1/2" INLET/ 1" OUTLET | 60 lbs | 27" x 21" x 12" |
| 21999-1010-MM | 10 hp | 40 CFM | Pneumatic | 1/2" INLET/ 1" OUTLET | 60 lbs | 27" x 21" x 12" |
| 21999-0955* | 10 hp | 40 CFM | Pneumatic | 1⁄2" | 190 lbs | 69" x 51" x 28" |

*Indicates 60 gallon tank mounted model



ULTRA REGENERATIVE DRYING SYSTEMS

Annual maintenance cost \$140 (2nd stage element) after 3+ years at \$220 / per desiccant canister

Ultra Dryers are designed as complete packages and include pre-filtration, PLC, Moisture Minder® automatic drains, and mounting hardware.

- Low relative humidity down to .01% RH
- Dew points down to -80°F
- Easy, low-cost maintenance under \$150/year average
- Digital display alerts when element change is due
- Three year warranty



| ITEM # | SIZE | MAX FLOW (CFM) | PORT SIZE | WEIGHT | DIMENSIONS (HWD) |
|-------------|-------|----------------|-----------|---------|------------------|
| 21999-0710 | 10 hp | 40 | 1" npt | 73 lbs | 30" x 30" x 12" |
| 21999-0715 | 15 hp | 60 | 1" npt | 93 lbs | 30" x 36" x 12" |
| 219990720 | 20 hp | 80 | 1" npt | 118 lbs | 30" x 42" x 12" |
| 219990730 | 30 hp | 120 | 1" npt | 118 lbs | 30" x 42" x 12" |
| 21999-0810* | 10 hp | 40 | 1" npt | 335 lbs | 69" x 51" x 28" |
| 21999-0815* | 15 hp | 60 | 1" npt | 358 lbs | 69" x 51" x 28" |
| 21999-0820* | 20 hp | 80 | 1" npt | 381 lbs | 69" x 51" x 28" |
| 21999-0830* | 30 hp | 120 | 1" npt | 381 lbs | 69" x 51" x 28" |

*Indicates 80 gallon tank mounted model



FOR MORE INFORMATION Call **1.800.782.5752** or visit **TSUNAMI.US.COM**

